


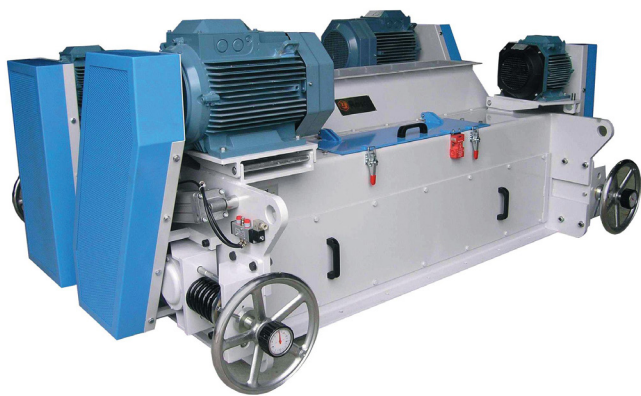

Crumbler

Desmenuzador de pellets
Измельчитель гранул

EN

Crumbles granules with minimal loss

Steel housing with 2 or 4 hardened rollers

Motorized rollers with micrometric adjustment

Pneumatic bypass for unprocessed granules

ES

Desmenuza gránulos en migajas con mínima pérdida

Carcasa de acero y 2 o 4 rodillos endurecidos

Rodillos motorizados con ajuste micrométrico

Desvío neumático para gránulos no procesados.







RU

Измельчает гранулы с минимальными потерями

Стальной корпус с 2 или 4 закалёнными вальцами

Привод каждого вальца с микрометрической настройкой

Пневматический обход для необрабатываемых гранул

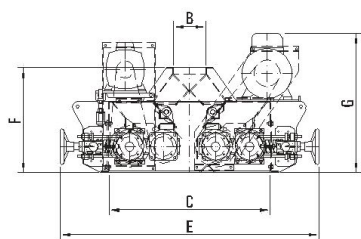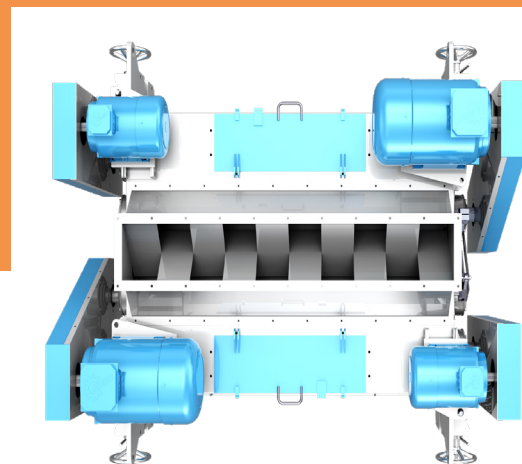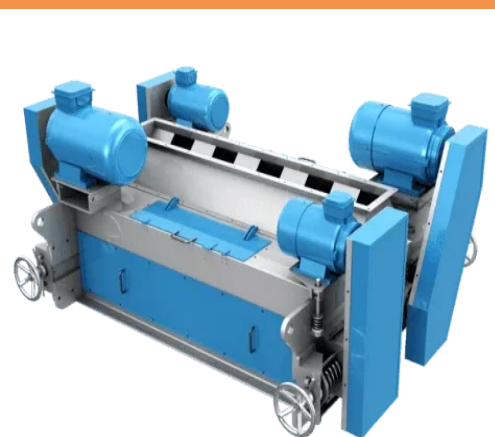

Type	A	B	C	D	E	F	G	C.A.P. TN/H	Weight	Volume m ³	Power	
											HP	Kw
DR - 220	1558	150	500	2100	1245	435	480	12 - 15	1200	1,25	10/20	7,5/15
DR - 225	1558	240	800	2400	1500	700	750	15 - 25	1600	1,78	10/30	7,5/22
DR - 420	1558	200	980	2100	1580	640	850	25 - 30	2450	2,95	(2)10/20	7,5/15
DR - 425	1558	240	1200	2400	1900	950	1100	30 - 40	2900	3,50	(2)10/20	(2)7,5/22